


# ARK ONE

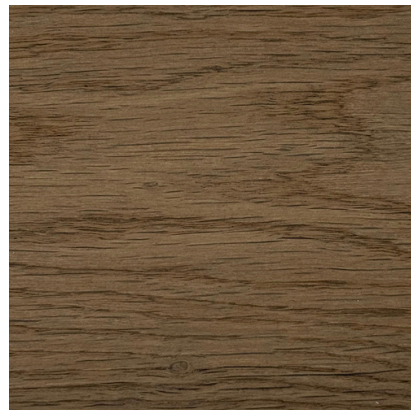

## SPECIFICATION

**RANGE:** Elements

**PRODUCT:** Brushed Cavendish

**SPECIES:** European Oak

**FORMAT:** Plank, herringbone, chevron, Versailles panel, mansion weave, bespoke pattern

French oak beautifully engineered and finished with hardwax oil

### Planks

Total thickness engineered: 15mm or 19mm (tolerance: +/- 0.2 mm, oak layer: 4mm tolerance: +/- 0,3 mm, underlay: Birch ply)

Width options: 180mm | 200mm | 220mm | 250mm | 300mm

Lengths: 1000- 2400mm, limited shorter lengths allowed. Lengths up to 4000mm are available upon request.

Provided with tongue and groove, micro bevel

### Herringbone

Total thickness engineered: 15mm (tolerance: +/- 0.2mm, oak layer: 4mm)

Dimensions 1: 90mm x 600mm

Dimensions 2: 120mm x 780mm

### Chevron

Total thickness engineered: 15mm (tolerance: +/- 0.2mm, oak layer: 4mm)

Dimensions 1: 90mm x 600mm

Dimensions 2: 120mm x 800mm

### Versailles Panel

Total Thickness solid: 15mm (tolerance: +/- 0.2mm, oak layer: 4mm)

Dimensions 1: 980mm x 980mm

Dimensions 2: 750mm x 750mm

Dimensions 3: 600mm x 600mm

Flat, knots filled, distressed, sanded. 8 % (tolerance: +/- 1 %)

I (indoor), RV 45- 75 %

In accordance with existing standards, with a top layer thickness of 4mm Oak. Class 33- commercial use.

Heavy use- intense used floor.

0.017 MG/m<sup>3</sup>

21 mm: 0.12 m<sup>2</sup> K/W

### Origin:

Janka Hardness Rating: 1,120 lbf (4,980N)

Formaldehyde Emission: E1 (EN 717-1)

Pentachlorophenol Emission: < 5ppm (CEN/TR 14823)

Slip testing: 65/39 PTV (BS 7976-2:2002+A1:2013)

Reaction to fire certification: Cfl-s1 (EN 13501-1:2007)